

What are Modular Sampling Systems ?



Modular Sampling Systems (MSS) use the open ISA 76 / IEC 62339 standard.

This field-proven international standard began in continuous process industry, but has been adopted by virtually all manufacturing sectors including pilot plants and Laboratories



Image © Parker IntraFlow

Why was MSS Developed ?



The Modular Sampling System standard was established to:

- Improve sampling/analyzer response times (reduced volume).
- Reduce physical size of sampling systems.
- Save time and cost during engineering and fabrication.
- Reduce sampling system spares inventory.
- Improve Mean Time To Repair (MTTR).
- Simplify maintenance tools (a single Hex Key / Allen™ Wrench).
- Simplify maintenance training.



MSS Involves 3 Logical “Layers”


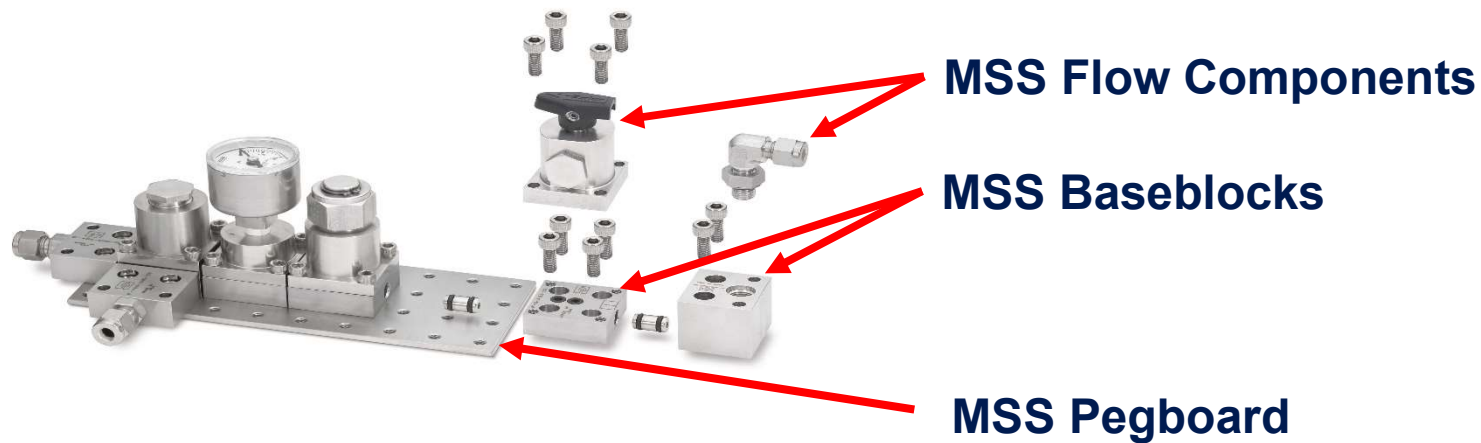


Image © Parker IntraFlow

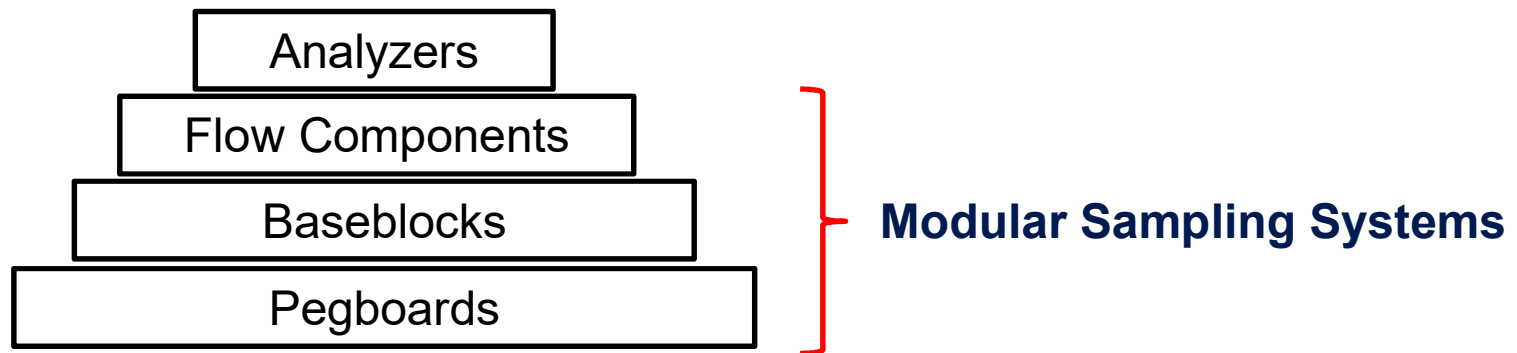

How MSS Works



Image © Parker IntraFlow

MSS standardizes:

- 1) A “Pegboard” mechanical backplane, with standard spacing of holes and mounting screws.
- 2) “Lego-style” Baseblocks with pre-drilled flow paths that create a flow network above the Pegboard. “Baseblock Connectors” between Baseblocks use industry-standard o-ring seals.
- 3) Flow Components with standard dimensions (e.g. valves, regulators, flow controllers, etc.) that connect to the Baseblocks.
- 4) Standardized interfaces for connection to sensors and analyzers.




MSS Pegboards

Each MSS System is built on a “backplane” consisting of one or more Pegboards. These Pegboards range in size from 2”x2” to 12”x12” (actual sizing is based on the number of threaded holes). Multiple Pegboards can be connected to accommodate any size or custom shape.

Each pegboard has a standardized matrix of threaded holes to accommodate 10-32 x 1/2” cap screws for mounting MSS-compatible “Baseblocks”, Flow Components and Analyzers from multiple suppliers.

Pegboards are available in both electrically and steam-heated (ASTM 6061 aluminum), and non-heated (ASTM 304 stainless steel) versions.

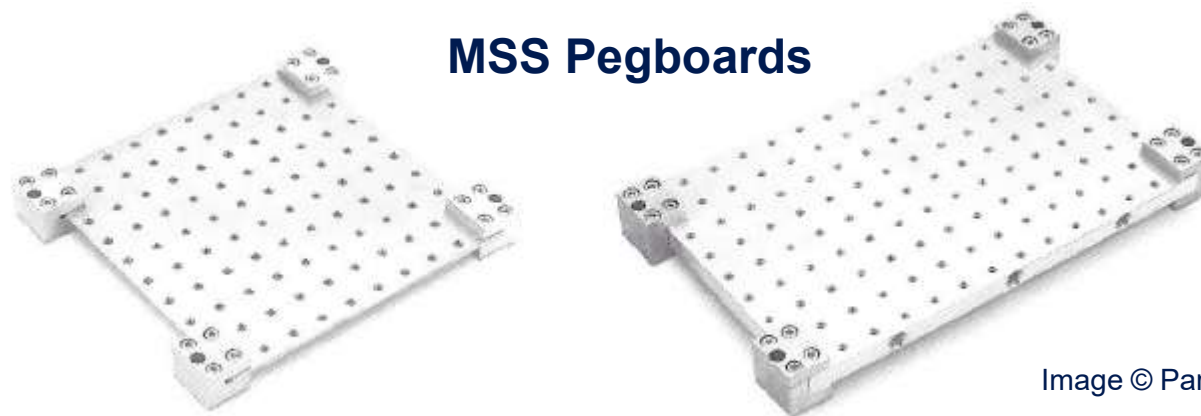

MSS Pegboards

Image © Parker IntraFlow

Baseblocks



MSS Baseblocks are assembled on the “Pegboard” backplane using an ordinary 5/32” hex key (Allen™ Wrench).

Each Baseblock has standard dimensions, and mounts on the Pegboard with #10-32 UNF x 1/2” socket-head cap screws.

Each Baseblock has pre-drilled flow paths (flow pattern shown on top)

Each Baseblock can be connected to adjacent Baseblocks using “Baseblock Connectors” that use industry-standard “o-ring” seals.

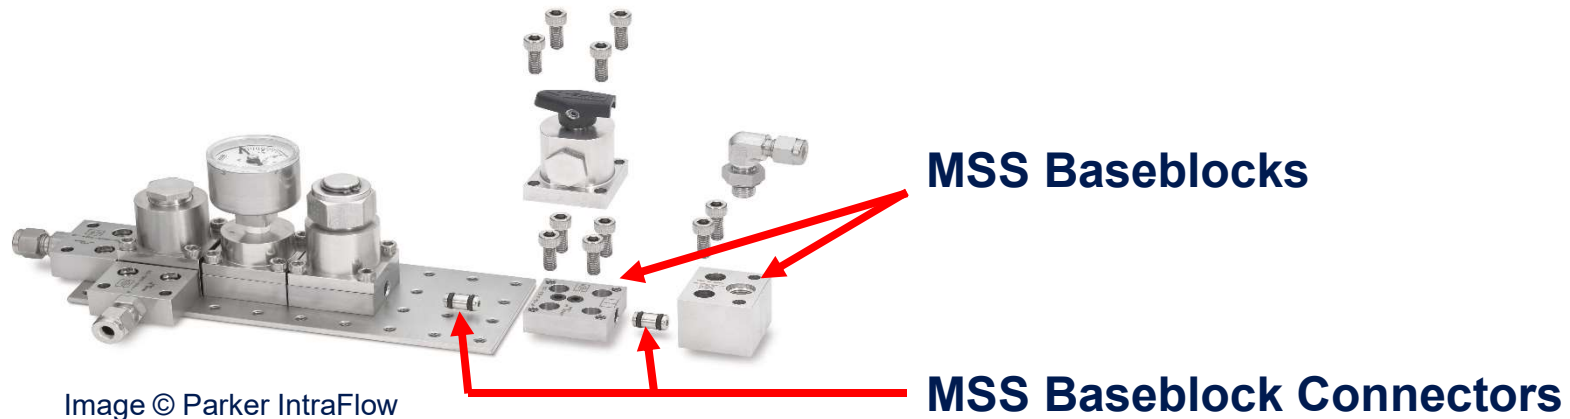


Image © Parker IntraFlow

MSS Flow Components



MSS Flow Components include devices such as:

- Manual & Actuated (pneumatic) Valves
- Particulate, Coalescing & Membrane Filters
- Rotameters and Flow sensors
- Volume and Mass Flow meters and controllers
- Flow, Pressure and Temperature transmitters and switches

MSS Flow Components must fit on a Baseblock, but can be any height.



Image © Parker IntraFlow

MSS Sensors & Analyzers



Sensors and Analyzers connect to the Modular Sampling System with a standardized Baseblock Interface.

MSS Sensors and Analyzers include chemical and physical property devices such as:

- Gas Chromatographs
- Raman probes
- NIR analyzers
- Oxygen sensors
- Moisture sensors
- pH sensors
- Conductivity sensors
- ORP sensors





Sensor to Baseblock Interfaces

A wide range of Sensors and Analyzers are available with MSS interfaces. Custom interfaces can be ordered.

Many Sensors have been specially designed to fit in MSS module format such as the MarqMetrix fiber optic Raman sensor shown at right.



Image © MarqMetrix

In some cases, MSS interfaces are provided to embed existing analytical devices such as this Teledyne Analytical PPM Oxygen sensor.

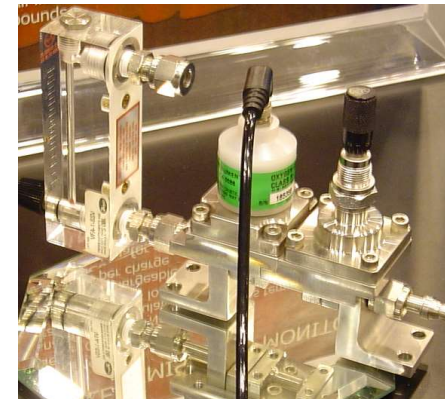


Image © CIRCOR Tech

Connection of DCS and Computers




Computers and Distributed Control Systems (DCS) may be connected to PLCs controlling the Flow Components and Analyzer(s).

Distributed Control Systems,
HMI or SCADA Computers

Standard Computer Protocols
(e.g. Ethernet, Fieldbus, Modbus)

Programmable Logic Controllers

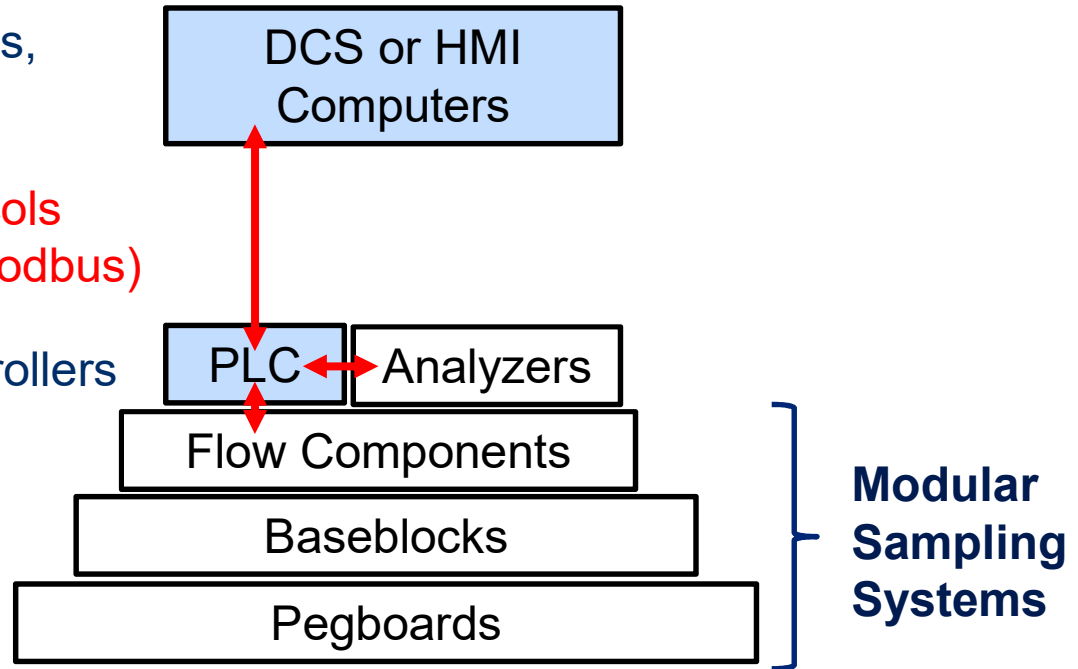

PLC Control Protocols




PLCs (and other shared logic control devices) may be used to:

- Manage Analyzers (including calculations, automatic calibration, and diagnostics).
- Control Flow Components (e.g. to provide selective sampling or control of heating)

Standard Control Protocols are used such as:

- CAN bus
- i2C
- Modbus
- Bit bus

Programmable Logic Controllers

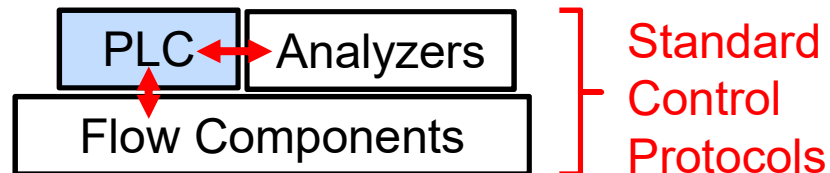

ISA 76 Modular Sampling System



The objectives of the MSS standard are:

1. Reduce physical size, response time and energy use of sampling systems.
2. Improve the reliability (MTBF) of analyzer and sampling systems.
3. Reduce cost and time associated with Engineering, Manufacture, Installation, and Commissioning.
4. Facilitate maintenance including MTTR (Mean Time To Repair).

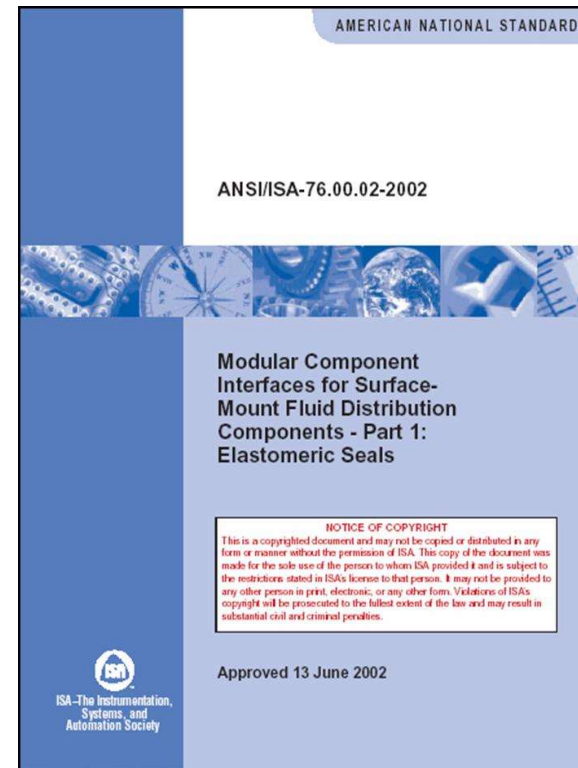


Image © International Society of Automation

To see how these objectives have been achieved see “Why Choose Modular Sampling Systems”.